


RB521S30

Schottky Barrier Diodes

Features


- Small surface mounting type
- Low reverse current and low forward voltage
- High reliability
- These are Pb-Free Devices

●External dimensions (Unit : mm)



SOD-523

●Land size figure (Unit : mm)



ORDER INFORMATION

| MODEL | PIN-PACKAGE | ORDERING NUMBER | PACKAGE MARKING | PACKAGE OPTION |
|--------------|--------------------|------------------------|------------------------|-----------------------|
| RB521S30 | SOD523 | RB521S30-2/TR | C | 3000/Tape&Reel |

Maximum Ratings and Electrical Characteristics, Single Diode @T_A=25°C

| Parameter | Symbol | Limits | Unit |
|----------------------------|------------------|---------------|-------------|
| DC reverse voltage | V _R | 30 | V |
| Mean rectifying current | I _O | 200 | mA |
| Peak forward surge current | I _{FSM} | 1 | A |
| Junction temperature | T _j | 125 | °C |
| Storage temperature | T _{stg} | -40~125 | °C |

Electrical Ratings @T_A=25°C

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|------------------|----------------|-------------|-------------|-------------|-------------|-----------------------|
| Forward voltage | V _F | | | 0.5 | V | I _F =200mA |
| Reverse current | I _R | | | 30 | µA | V _R =10V |

Typical Characteristics

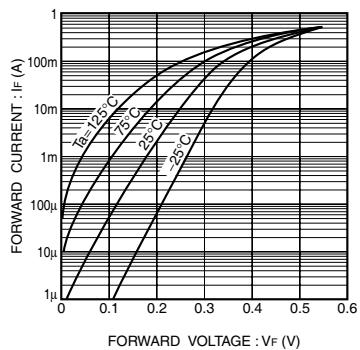


Fig. 1 Forward characteristics

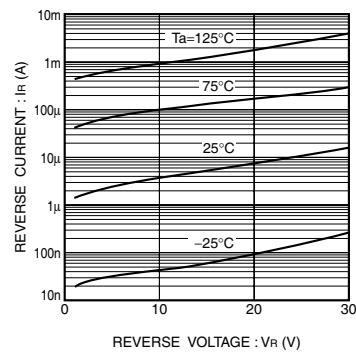


Fig. 2 Reverse characteristics

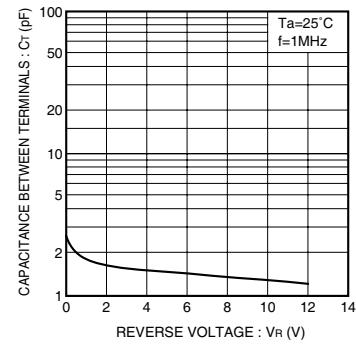


Fig. 3 Capacitance between terminals characteristics




Fig. 4 Derating curve
(mounting on glass epoxy PCBs)